


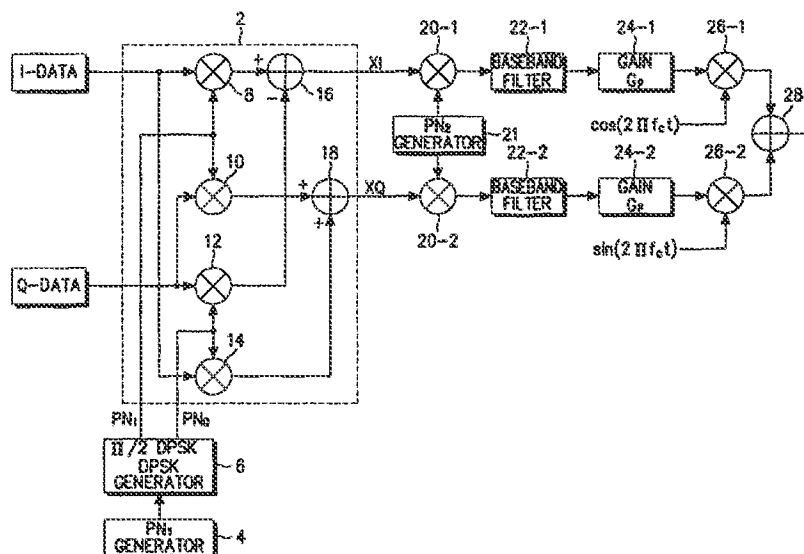

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b>  <b>H04B 7/216, 1/69</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/59265</b>  <b>(43) International Publication Date:</b> 18 November 1999 (18.11.99)
<b>(21) International Application Number:</b> PCT/KR99/00234 <b>(22) International Filing Date:</b> 12 May 1999 (12.05.99)  <b>(30) Priority Data:</b> 1998/17046 12 May 1998 (12.05.98) KR  <b>(71) Applicant:</b> SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do 442-370 (KR).  <b>(72) Inventors:</b> KIM, Je, Woo; 405-304, Grandbil, Kumi-dong, Puntang-gu, Songnam-shi, Kyonggi-do 463-500 (KR). HWANG, Young, Jun; 476-166, Tapshimni 1-dong, Tong-daemun-gu, Seoul 130-031 (KR). YOON, Soon, Young; 185, Kaepo-dong, Kangnam-gu, Seoul 135-240 (KR). YEOM, Jae, Heung; 680-7, Irwon 1-dong, Kangnam-gu, Seoul 135-231 (KR).  <b>(74) Agent:</b> LEE, Keon, Joo; Mihwa Building, 110-2, Myongryun-dong, 4-Ga, Chongro-gu, Seoul 110-524 (KR).		<b>(81) Designated States:</b> AU, BR, CA, CN, JP, RU, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** DEVICE AND METHOD FOR REDUCING THE PEAK-TO-AVERAGE POWER RATIO OF A MOBILE STATION'S TRANSMIT POWER

**(57) Abstract**

A device and method are provided for reducing the peak-to-average power ratio of a mobile station's transmit power in a mobile communication system by spreading and modulating the transmission data by a complex spreading sequence. The complex spreading sequence is generated to have a plurality of chips and a phase difference of  $90^\circ$  between every two successive complex chips in response to each chip of a PN (Pseudo Noise) sequence. The device and method flexibly control the mobile transmit power by limiting its peak-to-average power ratio to a specific range and thus confining the mobile transmit power to a linear characteristic portion in a characteristic curve of a power amplifier. The phase of the complex spreading sequence is prevented from shifting by  $180^\circ$  (i.e.,  $\pi$ ) to maintain the mobile transmit power in the linear portion of the power amplifier characteristic curve.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## DEVICE AND METHOD FOR REDUCING THE PEAK-TO-AVERAGE POWER RATIO OF A MOBILE STATION'S TRANSMIT POWER

5

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates generally to mobile communication systems, and in particular, to a device and method for reducing the peak-to-average power ratio of a mobile station's transmit power in a mobile communication system.

10

#### 2. Description of the Related Art

A typical CDMA mobile communication system focuses on voice service, whereas a 3G mobile communication system provides the additional services of high quality voice, high speed data, moving pictures, and Internet browsing. In such a mobile communication system, a radio link consists of a forward link directed from a base station (BS) to a mobile station (MS) and a reverse link directed from the MS to the BS.

15

When zero-crossing occurs during spreading and modulation in a reverse link transmission (a phase variation is  $\pi$ ), the peak-to-average power ratio of the mobile station's transmit power (mobile transmit power) increases, thereby producing regrowth. Regrowth adversely affects the communication quality of calls being made by other subscribers. Hence, the peak-to-average power ratio is a significant factor in the design and performance of a power amplifier in an MS.

20

Regrowth occurs due the existence of a linear portion and a non-linear portion in a characteristic curve of the mobile station's power amplifier. As the mobile transmit power increases, a transmit signal of the MS due to the non-linear characteristics generates interference in the frequency area of a different user  
5 causing the regrowth phenomenon.

Regrowth can be prevented by shrinking down a cell and sending a signal from an MS in the cell to a corresponding BS at a low power level. Thus, mobile transmit power can be flexibly controlled if the mobile station's peak-to-average power ratio can be limited to a specific range. However, it is not economical to  
10 physically shrink a cell, since more cells are then needed for a given area and each cell requires its own communications equipment.

### SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to provide device and method for reducing the peak-to-average power ratio of a mobile station's transmit  
15 power in a mobile communication system.

Another object of the present invention is to provide a method of flexibly controlling mobile transmit power by limiting its peak-to-average power ratio to a specific range.

A further object of the present invention is to provide a method of flexibly  
20 varying a cell size in a mobile communication system to counteract regrowth.

A still further object of the present invention is to provide a method of enhancing auto-correlation characteristics of a multipath signal and cross-

correlation characteristics relative to other users.

To achieve these and other objects, a device and method for reducing the peak-to-average power ratio of mobile transmit power in a mobile communication system are provided. The device and method spread mobile transmission data by  
5 a complex spreading sequence. The complex spreading sequence includes a plurality of chips and is generated to have a phase difference of  $90^\circ$  between every two successive complex chips in response to each chip of a PN (Pseudo Noise) sequence.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

10 FIG. 1 is a block diagram of a mobile station for performing the spreading and modulating method according to an embodiment of the present invention;

FIG. 2 is a block diagram of a first embodiment of a  $\pi/2$  DPSK (Differential Phase Shift Keying) shown in FIG. 1;

FIGS. 3A and 3B illustrate signal constellation and phase transition of  
15 complex spreading sequences according to the structure of the  $\pi/2$  DPSK generator shown in FIG. 2;

FIG. 4 is a block diagram of a second embodiment of a  $\pi/2$  DPSK generator shown in FIG. 1;

FIGS. 5A and 5B illustrate signal constellation and phase transition of  
20 complex spreading sequences according to the structure of the  $\pi/2$  DPSK generator shown in FIG. 4;

FIG. 6 is a block diagram of a mobile station in a 3G IS-95 system to which

the spreading and modulating method according to the present invention is applied;  
and

FIG. 7 is a block diagram of a mobile station in a W-CDMA (Wideband Code Division Multiple Access) system to which the spreading and modulating  
5 method according to the present invention is applied.

### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

Preferred embodiments of the present invention will be described herein below with reference to the accompanying drawings. In the following description, well known constructions or functions are not described in detail so as not to  
10 obscure the present invention.

The present invention includes the following novel and inventive features:

(1) mobile transmit power can be flexibly controlled by limiting its peak-to-average power ratio to a specific range and thus confining the mobile transmit power to a linear characteristic portion in a characteristic curve of a power  
15 amplifier;

(2) the phase of a complex spreading sequence is prevented from shifting by  $180^\circ$  (i.e.,  $\pi$ ) to maintain the mobile transmit power in the linear portion of the power amplifier characteristic curve;

(3) the phase difference between every two successive complex chips of a  
20 complex spreading sequence ( $PN_I$  and  $PN_Q$ ) is  $90^\circ$  (i.e.,  $\pi/2$ ) to limit the output power range of baseband filters and thereby, reduce the peak-to-average power ratio of mobile transmit power; and

(4) auto-correlation characteristics of a multipath signal and cross-correlation characteristics relative to other users are improved by resspreading a signal which has passed through a complex spreader by a spreading sequence  $PN_2$  generated from a PN code generator.

5 It is to be appreciated in the embodiment of the present invention that " $\pi/2$  DPSK (Differential Phase Shift Keying)" does not refer to a typical DPSK and is so named because the complex spreading sequence  $PN_I + jPN_Q$  generated in the  $\pi/2$  DPSK generator has a phase variation of  $\pi/2$  for one chip duration.

With reference to FIG. 1, there is shown a schematic block diagram of a  
10 mobile station (MS) which will be referred to for describing methods of spreading and modulating mobile transmission data for reducing the peak-to-average power ratio of mobile transmit power according to embodiments of the present invention. A complex signal including in-phase data I-data and quadrature-phase data Q-data is applied as a first input signal to a complex spreader 2. A  $PN_I$  generator 4  
15 generates a sequence  $PN_I$ , and a  $\pi/2$  DPSK generator 6 generates complex spreading sequences  $PN_I$  and  $PN_Q$  with the sequence  $PN_I$  received from the  $PN_I$  generator 4. The complex spreading sequences  $PN_I$  and  $PN_Q$  are fed as a second input signal to the complex spreader 2. The embodiment of the present invention is characterised in that there is no zero-crossing since the phase difference between  
20 every two successive complex chips of the complex spreading sequence ( $PN_I$  and  $PN_Q$ ) is  $\pi/2$ . The structure and operation of the  $\pi/2$  DPSK generator 6 is described in detail below with reference to FIGS. 2 to 5B.

In FIG. 1, the complex spreader 2 includes multipliers 8, 10, 12, and 14 and

adders 16 and 18 for complex-spreading the complex signal by the complex spreading sequences  $PN_I$  and  $PN_Q$ . A detailed description of the operation of the complex spreader 2 can be found in Korean Patent Application No. 98-7667 having a common assignee.

5 Multipliers 20-1 and 20-2 multiply the resulting in-phase spread signal  $XI$  and quadrature-phase spread signal  $XQ$  received from the complex spreader 2 by a sequence  $PN_2$  generated from a  $PN_2$  generator 21 for additional spreading. In the embodiment of the present invention, the sequences  $PN_I$  and  $PN_2$  are independent. It is contemplated that sequences  $PN_I$  and  $PN_2$  may entail a PN sequence generated  
10 by user identification code. And in this invention, multiplying the output of complex spreader 2 by PN 2 could be optional feature.

The outputs of the multipliers 20-1 and 20-2 are subjected to baseband filtering by baseband filters 22-1 and 22-2, and to gain ( $G_p$ ) control by gain controllers 24-1 and 24-2, respectively. Then, mixers 26-1 and 26-2 multiply the  
15 outputs of the gain controllers 24-1 and 24-2 by their respective corresponding carriers,  $\cos(2\pi f_c t)$  and  $\sin(2\pi f_c t)$ , for frequency up-conversion, and an adder 28 sums the outputs of the mixers 26-1 and 26-2.

In accordance with the present invention, auto-correlation characteristic of a multipath signal and cross-correlation characteristics relative to other users are  
20 improved by spreading an input complex signal two times: once time by the sequence  $PN_I$  and another time by the sequence  $PN_2$ . Here, the sequences  $PN_I$ ,  $PN_2$ ,  $PN_I$ , and  $PN_Q$  have the same chip rate.

If the phase of a complex spreading sequence  $PN_I + jPN_Q$  output from a



spreading sequence generator drastically changes, (for example, from  $0^\circ$  to  $180^\circ$ ) it causes increase of the peak-to-average power ratio of mobile transmit power leads to regrowth and degrades the communication quality of a different user.

However, the spreading sequence generator is configured that no zero-crossing (no phase variation of  $\pi$ ) is produced in generating the complex spreading sequence  $PN_I + jPN_Q$  in the embodiment of the present invention.

FIG. 2 is a block diagram of the  $\pi/2$  DPSK generator 6 provided as the spreading sequence generator according to the present invention. The feature of the  $\pi/2$  DPSK generator 6 is that a maximum phase difference between every two successive complex chips of the complex spreading sequence  $PN_I + jPN_Q$  is  $\pi/2$ .

The  $\pi/2$  DPSK generator 6 includes a complex function calculator 32, a complex multiplier 34, and delay registers 36 and 38. A multiplier 30 multiplies the PN chips of the sequence  $PN_I$  by  $(+)\pi/2$  or  $(-)\pi/2$ . It is contemplated that the multiplier 30 multiplies every one PN chip of the sequence  $PN_I$  by any phase in the range of  $(+)\pi/2$  or  $(-)\pi/2$ .

The complex function calculator 32 produces complex data  $Re + jIm$  by operating every one phase shifted PN chip output of the multiplier 30 in a complex function  $\exp(j[\cdot])$ . The complex multiplier 34 complex-multiplies the complex data  $Re + jIm$  by values (complex data) received from the delay registers 36 and 38 and outputs the complex spreading sequence  $PN_I + jPN_Q$  chip unit. The delay register 36 stores the value  $PN_I$  for one chip duration and the delay register 38 stores the value  $PN_Q$  for one chip duration. The initial values (complex data) of the delay registers 36 and 38 are determined by

(Equation 1)

delay register 36 =  $Re[\exp(j\theta)]$

delay register 38 =  $Im[\exp(j\theta)]$ ,

where  $\theta$  may be any value, preferably  $\pi/4$ .

5 Assuming that the consecutive chips of the sequences  $PN_1$  and  $PN_2$  are  $\{1, -1, 1, -1, \dots\}$  and  $\{-1, 1, -1, 1, \dots\}$ , respectively, and the initial values of the delay registers 36 and 38 are 1, the consecutive chips of the complex spreading sequence  $PN_1+jPN_2$  generated from the  $\pi/2$  DPSK generator 6 are  $\{(-1+j), (1+j), (-1+j), (1+j), \dots\}$ , and the consecutive chips of a complex spreading sequence input to the  
10 baseband filters 22-1 and 22-2 are  $\{(1-j), (1+j), (1-j), (1+j), \dots\}$ . The sequences  $PN_1$  and  $PN_2$  can be long codes for user identification in the 3G CDMA system.

FIGS. 3A and 3B illustrate signal constellations and phase transitions of the complex spreading sequence  $PN_1+jPN_2$  output from the  $\pi/2$  DPSK generator 6 and the complex spreading sequence input to the baseband filters 22-1 and 22-2,  
15 respectively. Referring to FIGS. 1 to 3B, for the first PN chip 1 of the sequence  $PN_1$ , the output of the multiplier 30 in the  $\pi/2$  DPSK generator 6 is  $\pi/2$  since the other input to the multiplier 30 is  $\pi/2$ , and the complex data output from the complex function calculator is  $e^{j\frac{\pi}{2}}$  expressed as  $(0+1j)$  in the complex numeral form (Re+jIm). Therefore, the complex multiplier 34 produces complex data  $(-1+j)$   
20  $= (0+j) \times (1+j)$ . Here,  $(0+j)$  is the complex data output from the complex function calculator 32 and  $(1+j)$  is the initial values of the delay registers 36 and 38.

In FIG. 3A, the complex data  $(-1+j)$  exists in the second quadrant of an orthogonal coordinates graph defined by real components (Re) and imaginary

components (Im) of a complex signal. The real part -1 of the complex data  $(-1+j)$  is stored in the delay register 36 for one chip duration, and the imaginary part 1 is stored in the delay register 38 for one chip duration.

For the second PN chip -1 of the sequence  $PN_1$ , the output of the multiplier 30 in the  $\pi/2$  DPSK generator 6 is  $-\pi/2$ , and the complex data output from the complex function calculator 32 is  $e^{-j\frac{\pi}{2}}$  expressed as  $(0-j)$  in the complex numeral form (Re+jIm). Therefore, the complex multiplier 34 produces complex data  $(1+j) = (0-j) \times (-1+j)$ . Here,  $(0-j)$  is the complex data output from the complex function calculator 32 and  $(-1+j)$  is the previous values of the delay registers 36 and 38.

In FIG. 3A, the complex data  $(1+j)$  exists in the first quadrant of the orthogonal coordinates graph. The real part 1 of the complex data  $(1+j)$  is stored in the delay register 36 for one chip duration, and the imaginary part 1 is stored in the delay register 38 for one chip duration. In this manner, the complex data output from the complex multiplier 34 is  $(-1+j)$  for the third PN chip 1 of the sequence  $PN_1$ , and  $(1+j)$  for the fourth PN chip -1 of the sequence  $PN_1$ .

With continued reference to FIG. 3A, the complex spreading sequence  $PN_1+jPN_Q$  exists in the second and first quadrants of the orthogonal coordinates graph defined by the real components (Re) and the imaginary components (Im) of a complex signal, with a phase difference of  $\pi/2$  between every two successive complex chips.

The  $\pi/2$  phase difference between every two successive complex chips is maintained in a complex spreading sequence obtained by resspreading the sequence  $PN_2$ . Referring to FIG. 1, a complex spreading sequence  $\{(1-j), (1+j), (1-j), (1+j),$

...} is produced by multiplying the chips  $\{(-1+j), (1+j), (-1+j), (1+j), \dots\}$  of the complex spreading sequence  $PN_I+jPN_Q$  by the chips  $\{-1, 1, -1, 1, \dots\}$  of the sequence  $PN_2$ . As shown in FIG. 3B, the complex spreading sequence input to the baseband filters 22-1 and 22-2 has the phase difference of  $\pi/2$  between every two  
 5 successive complex chips like the complex spreading sequence  $PN_I+jPN_Q$ .

Since the phase difference between every two successive complex chips of the complex spreading sequences is small, that is,  $\pi/2$  as noted by FIGS. 3A and 3B, the peak-to-average power ratio of mobile transmit power after processing in the baseband filters 22-1 and 22-2 is reduced, decreasing the influence of regrowth. As  
 10 a result, communication quality and performance are improved.

If a predetermined radian value input to the multiplier 30 of the  $\pi/2$  DPSK generator 6 is  $-3\pi/2$ , the complex spreading sequence  $PN_I+jPN_Q$  also shows the signal constellation of FIG. 3A. If the radian value is  $-\pi/2$  or  $3\pi/2$ , the chips of the complex spreading sequence  $PN_I+jPN_Q$  are successively shown at the same  
 15 positions in the alternating first and second quadrants, starting from the first quadrant in FIG. 3A.

FIG. 4 is a block diagram of a second embodiment of the  $\pi/2$  DPSK generator 6 shown in FIG. 1. As with the first embodiment, the maximum phase difference between every two successive complex chips of the complex spreading  
 20 sequence  $PN_I+jPN_Q$  is  $(+/-) \pi/2$ . The  $\pi/2$  DPSK generator 6 of the second embodiment includes an adder 40, a delay register 42, and a complex function calculator 44. The adder 40 adds a PN chip of the sequence  $PN_I$  with the previous output of the adder 40 stored in the delay register 42. It is preferable to set the initial

value of the delay register 42 to 1/2. The complex function calculator 44 produces the complex spreading sequence  $PN_I + jPN_Q$  by operating the output of the adder 40 in a complex function  $\exp[j(\pi/2(\cdot))]$ .

The phase variation of the complex spreading sequence  $PN_I + jPN_Q$  is given  
5 by

(Equation 2)

$$\angle(PN_I^{(k)} + jPN_Q^{(k)}) = \theta(k)$$

$$\theta(k) = \theta(k-1) + \frac{\pi}{2} PN_I.$$

It is noted from equation (2) that the phase in the current chip of the complex  
10 spreading sequence  $PN_I + jPN_Q$  is the sum of the phase in the previous chip thereof and the product of the current chip of the sequence  $PN_I$  by  $\pi/2$ .

Assuming that the consecutive chips of the sequences  $PN_1$  and  $PN_2$  are  $\{1, -1, 1, -1, \dots\}$  and  $\{-1, 1, -1, 1, \dots\}$ , respectively and the initial value of the delay register 42 is 1/2, then the consecutive chips of the complex spreading sequence  
15  $PN_I + jPN_Q$  generated from the  $\pi/2$  DPSK generator 6 are  $\{(-1+j), (1+j), (-1+j), (1+j), \dots\}$ , and the consecutive chips of the complex spreading sequence input to the baseband filters 22-1 and 22-2 are  $\{(1-j), (1+j), (1-j), (1+j), \dots\}$ . The sequences  $PN_1$  and  $PN_2$  can be long codes for user identification in the 3G CDMA system.

FIGS. 5A and 5B are views illustrating the signal constellations and phase  
20 transitions of the complex spreading sequence  $PN_I + jPN_Q$  output from the  $\pi/2$  DPSK generator 6 and the complex spreading sequence input to the baseband filters 22-1 and 22-2, respectively.

Referring to FIGS. 1 to 5B, for the first PN chip 1 of the sequence  $PN_1$ , the

output of the adder 40 is  $3/2$  ( $=1+1/2$ ), which is stored in the delay register 42 for one chip duration, and the complex data output from the complex function calculator 44 is  $e^{j\frac{3\pi}{4}}$  expressed as  $(-1+j)$  in the complex numeral form (Re+jIm), and a chip of the complex spreading sequence  $PN_I+jPN_Q$ . Here,  $(-1+j)$  exists in the  
 5 second quadrant of an orthogonal coordinates graph shown in FIG. 5A.

For the second PN chip  $-1$  of the sequence  $PN_I$ , the output of the adder 40 is  $1/2$  ( $=-1+3/2$ ), which is stored in the delay register 42 for one chip duration, and the complex data output from the complex function calculator 44 is  $e^{j\frac{\pi}{4}}$  expressed as  $(1+j)$  in the complex numeral form (Re+jIm). Here,  $(1+j)$  is present in the first  
 10 quadrant of the orthogonal coordinates graph shown in FIG. 5A. In this manner, the complex data output from the complex function calculator 44 is  $(-1+j)$  for the third PN chip 1 of the sequence  $PN_I$ , and  $(1+j)$  for the fourth PN chip  $-1$  of the sequence  $PN_I$ .

With continued reference to FIG. 5A, the complex spreading sequence  
 15  $PN_I+jPN_Q$  exists in the second and first quadrants of the orthogonal coordinates plane defined by the real components (Re) and the imaginary components (Im) of a complex signal, with a phase difference  $\pi/2$  between every two successive complex chips.

The phase difference of  $\pi/2$  between every two successive complex chips is  
 20 maintained in a complex spreading sequence obtained by resspreading the complex spreading sequence  $PN_I+jPN_Q$  by the sequence  $PN_2$  (It is noted that the complex spreading sequence can also be resspread by the original sequence PN or different PN sequence.). Referring to FIG. 1, a complex spreading sequence  $\{(1-j), (1+j),$

( $1-j$ ), ( $1+j$ ), ...} is produced by multiplying the chips  $\{(-1+j), (1+j), (-1+j), (1+j), \dots\}$  of the complex spreading sequence  $PN_I+jPN_Q$  by the chips  $\{-1, 1, -1, 1, \dots\}$  of the sequence  $PN_2$ . As shown in FIG. 5B, the complex spreading sequence input to the baseband filters 22-1 and 22-2 has the phase difference  $\pi/2$  between every two successive complex chips like the complex spreading sequence  $PN_I+jPN_Q$ .

Since the phase difference between every two successive complex chips of the complex spreading sequence is small, that is,  $\pi/2$  as noted from FIGS. 5A and 5B, the peak-to-average power ratio of mobile transmit power after processing in the baseband filters 22-1 and 22-2 is reduced, thereby, counteracting the regrowth phenomenon. As a result, communication quality and performance are improved.

FIG. 6 is a block diagram of an MS in a 3G IS-95 system to which the spreading and modulation method according to the embodiment of the present invention is applied. Reverse communication channels are comprised of a pilot channel which is always activated, a control channel, a fundamental channel deactivated in a specific frame, and a supplemental channel. The pilot channel is unmodulated and used for performing initial acquisition, time tracking, and synchronization of a rake receiver. This allows reverse-link closed-loop power control. A dedicated control channel transmits an uncoded fast power control bit and coded control information. The two types of information are multiplexed and sent on one control channel. The fundamental channel is used to send RLP (Radio Link Protocol) frames and packet data.

The channels are spread by Walsh codes for orthogonal channelization. Control, supplemental, and fundamental channel signals are multiplied by

corresponding Walsh codes in multipliers 50, 52, and 54, respectively. Relative gain controllers 56, 58, and 60 control the relative gains  $G_c$  of the outputs of the multipliers 50, 52, and 54, respectively. An adder 62 adds a pilot channel signal with a control channel signal received from the relative gain controller 56. The  
5 added information of the adder 62 is applied as an I-channel signal. An adder 64 adds a supplemental channel signal output from the relative gain controller 58 with a fundamental channel signal output from the relative gain controller 60. The added information of the adder 64 is assigned as a Q-channel signal.

A signal sent on the pilot, dedicated control, fundamental, and supplemental  
10 channel signals is a complex signal as shown in FIG. 1. The sum of the pilot channel and the control channel is assigned as the I-channel, and the sum of the fundamental channel and the supplemental channel is assigned as the Q-channel. The complex signal of the I and Q channels is complex-spread by the complex spreading sequence  $PN_I + jPN_Q$  in the complex spreader 2 of FIG. 6. The complex-  
15 spread signal is multiplied by the sequence  $PN_2$ , that is, a long code for user identification. The resulting complex spreading sequence is subjected to baseband filtering in the baseband filters 22-1 and 22-2, and sent through the gain controllers 24-1 and 24-2, the mixers 26-1 and 26-2, and the adder 28 with a low peak-to-average power ratio.

20 FIG. 7 is a block diagram of an MS in a W-CDMA system to which the spreading and modulating method of the present invention is applied. In FIG. 7, a traffic signal is sent on a dedicated physical data channel (DPDCH), and a control signal is sent on a dedicated physical control channel (DPCCH). The DPDCH is



multiplied by a channelization code  $C_D$  at a chip rate in a multiplier 70 and assigned as an I channel. The DPCCH is multiplied by a channelization code  $C_C$  at a chip rate in a multiplier 72, converted to an imaginary numeral form by an imaginary operand ( $\cdot j$ ) 74, and assigned as a Q channel. Here,  $C_D$  and  $C_C$  are mutually orthogonal codes. The I and Q channels form a complex signal. The complex signal is complex-spread by the complex spreading sequence  $PN_I + jPN_Q$  in the complex spreader 2 of FIG. 7, and multiplied by the sequence  $PN_2$ ; that is, a long code for user identification generated in the  $PN_2$  generator 21. The resulting complex spreading sequence is subject to baseband filtering in the baseband filters 22-1 and 22-2, and sent through the gain controllers 24-1 and 24-2, the mixers 26-1 and 26-2, and the adder 28 with a low peak-to-average power ratio.

According to the present invention as described above, the peak-to-average power ratio of mobile transmit power is limited to a specific range by ensuring a phase difference of  $90^\circ$  between every two successive complex chips of a complex spreading sequence. Therefore, the mobile transmit power appears only in a linear portion of a characteristic curve of a power amplifier, thereby allowing the mobile transmit power and the cell size to be flexibly controlled. In addition, auto-correlation characteristics of a multipath signal and cross-correlation characteristics relative to other users can be improved by resspreading a signal which has passed through a complex spreader by another PN sequence generated from a PN code generator.

While the invention has been shown and described with reference to certain preferred embodiments thereof, it will be understood by those skilled in the art that

various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A method for reducing the peak-to-average power ratio of a mobile station's transmit power in a mobile communication system, comprising the steps of:

5 generating a complex spreading sequence having a plurality of chips and a phase difference of  $90^\circ$  between every two successive complex chips in response to each chip of a PN (Pseudo Noise) sequence; and

spreading and modulating mobile transmission data by the complex spreading sequence.

10 2. The method of claim 1, wherein the step of generating the complex spreading sequence comprises the steps of:

multiplying the chips of the PN sequence by a predetermined phase value to produce phase shifted chips;

15 converting the phase shifted chips to complex data using each of the phase shifted chips as a phase; and

multiplying the converted complex data by previously converted complex data to generate the plurality of chips of the complex spreading sequence.

3. The method of claim 2, wherein the step of converting uses a complex function  $\exp(j[\cdot])$  to convert the phase shifted chips to complex data.

20 4. The method of claim 2, wherein the predetermined phase value is

within the range of  $\pm\pi/2$  to  $\pm3\pi/2$ .

5. The method of claim 1, wherein the step of generating the complex spreading sequence comprises the steps of:

adding every chip of the PN sequence with a respective pre-stored chip to  
5 obtain added chips; and

converting the added chips to complex data to generate the plurality of chips of the complex spreading sequence.

6. The method of claim 5, wherein the step of converting uses a complex function  $\exp[j(\pi/2(\cdot))]$  to convert the added chips to complex data.

10 7. The method of claim 1, further comprising the step of resspreading the spread and modulated mobile transmission data by an independent PN sequence.

8. A device for reducing the peak-to-average power ratio of a mobile station's transmit power in a mobile communication system, comprising:

a complex spreading sequence generator for generating a complex spreading  
15 sequence having a plurality of chips and a phase difference of  $90^\circ$  between every two successive complex chips in response to each chip of a PN sequence; and

a spreader for spreading and modulating mobile transmission data by the complex spreading sequence.

9. The device of claim 8, wherein the complex spreading sequence generator comprises:

a multiplier for multiplying the chips of the PN sequence by a predetermined phase value to produce phase shifted chips;

5 a complex data generator for converting the phase shifted chips to complex data using each of the phase shifted chips as a phase; and

a complex multiplier for generating the plurality of chips of the complex spreading sequence by multiplying the converted complex data by previously converted complex data.

10 10. The device of claim 9, wherein a complex function  $\exp(j[\cdot])$  is used in converting the phase shifted chips to complex data.

11. The device of claim 9, wherein the predetermined phase value is within the range of  $\pm\pi/2$  and  $\pm3\pi/2$ .

12. The device of claim 8, wherein the complex spreading sequence  
15 generator comprises:

an adder for adding every chip of the PN sequence with a respective pre-stored chip to obtain added chips; and

a complex data generator for generating the plurality of chips of the complex spreading sequence by converting the added chips to complex data.

13. The device of claim 12, wherein a complex function  $\exp[j(\pi/2(\cdot))]$  is used in converting the added chips to complex data.

14. The device of claim 8, further comprising a re-spreader for resspreading the spread and modulated mobile transmission data by an independent  
5 PN sequence.

15. The device of claim 14, wherein the independent PN sequence is identical to the PN sequence.

16. A device for reducing the peak-to-average power ratio of a mobile station's transmit power in a mobile communication system, comprising:

10 complex spreading sequence generating means for generating a complex spreading sequence having a plurality of chips and a phase difference of  $90^\circ$  between every two successive complex chips in response to each chip of a PN sequence; and

spreading means for spreading and modulating mobile transmission data by  
15 the complex spreading sequence.

17. The device of claim 16, wherein the complex spreading sequence generating means comprises:

multiplying means for multiplying the chips of the PN sequence by a predetermined phase value to produce phase shifted chips;

complex data generating means for converting the phase shifted chips to complex data using each of the phase shifted chips as a phase; and

complex multiplying means for generating the plurality of chips of the complex spreading sequence by multiplying the converted complex data by  
5 previously converted complex data.

18. The device of claim 17, wherein the predetermined phase value is within the range of  $\mp\pi/2$  and  $\mp3\pi/2$ .

19. The device of claim 16, wherein the complex spreading sequence generating means comprises:

10 adding means for adding every chip of the PN sequence with a respective pre-stored chip to obtain added chips; and

complex data generating means for generating the plurality of chips of the complex spreading sequence by converting the added chips to complex data.

20. The device of claim 16, further comprising re-spreading means for  
15 resspreading the spread and modulated mobile transmission data by an independent PN sequence.

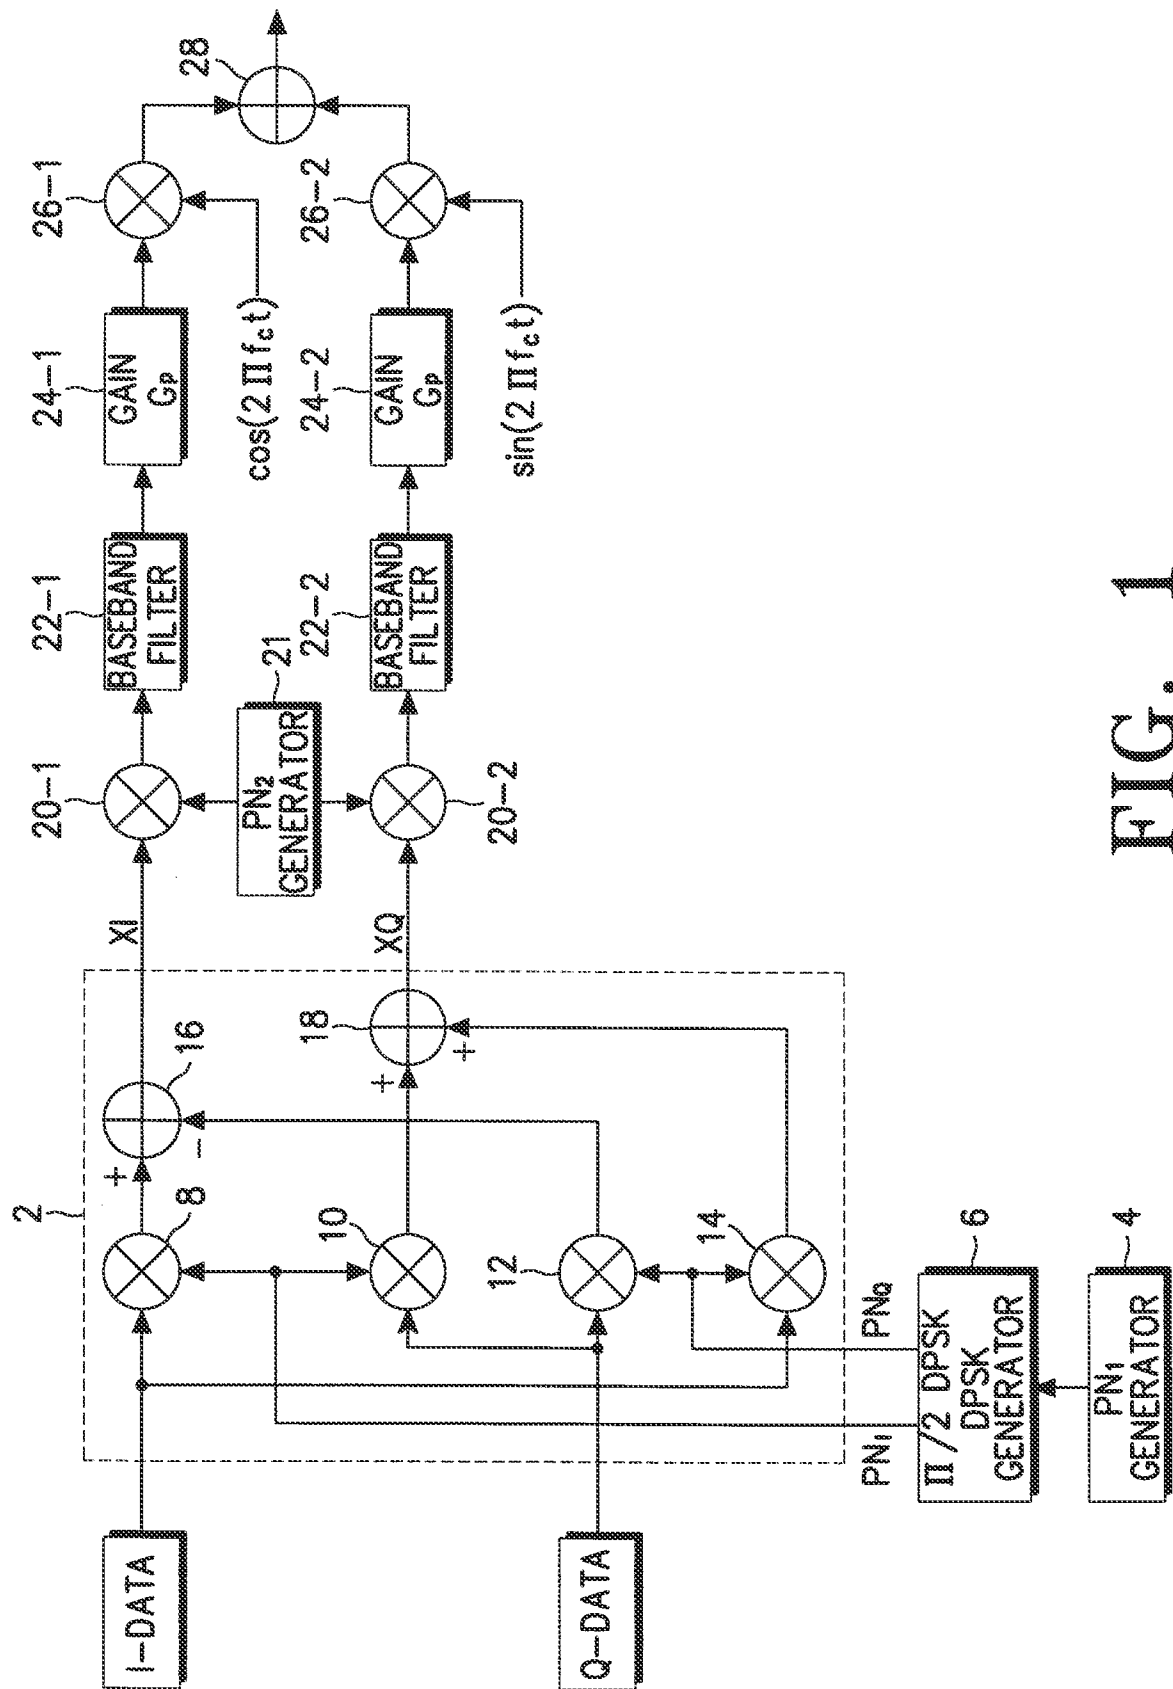


FIG. 1



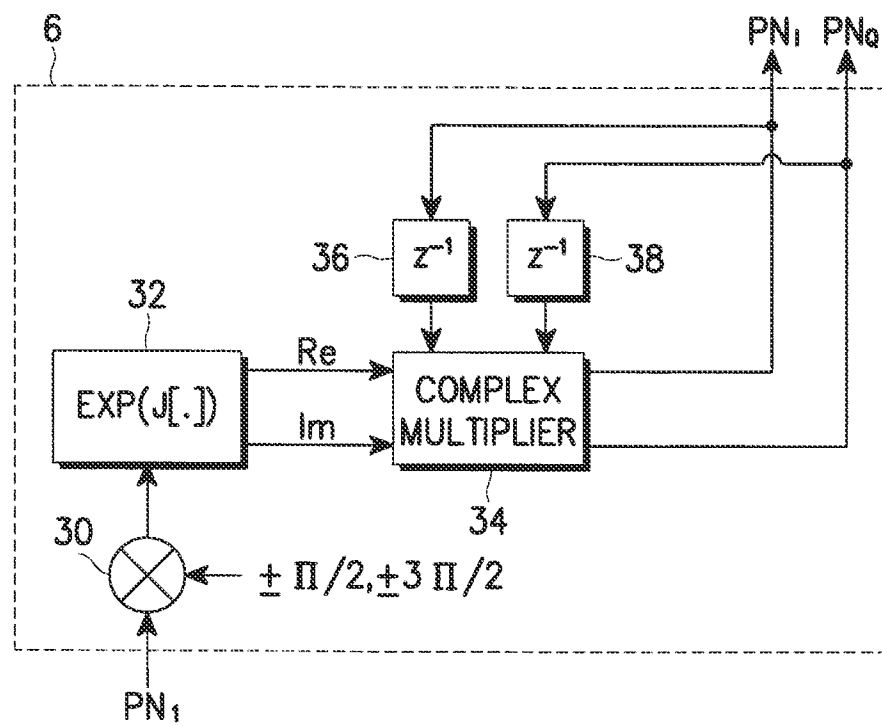


FIG. 2

3/9

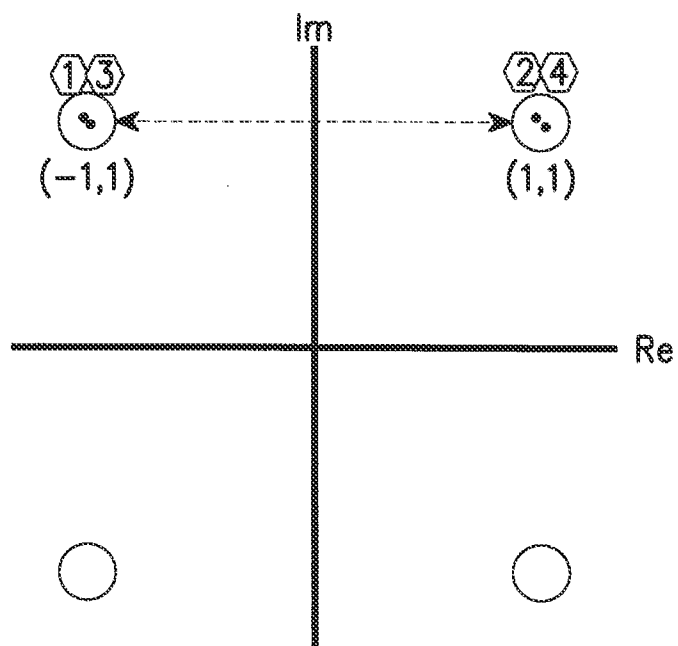


FIG. 3A

4/9

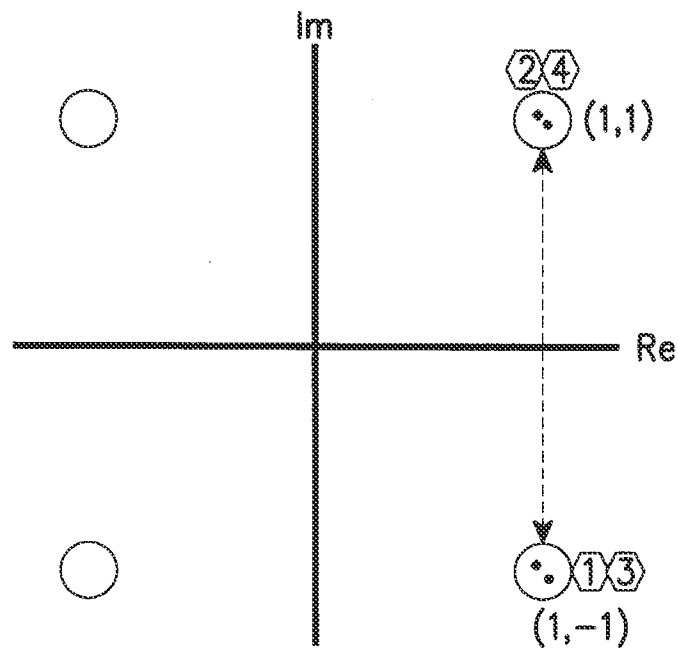


FIG. 3B

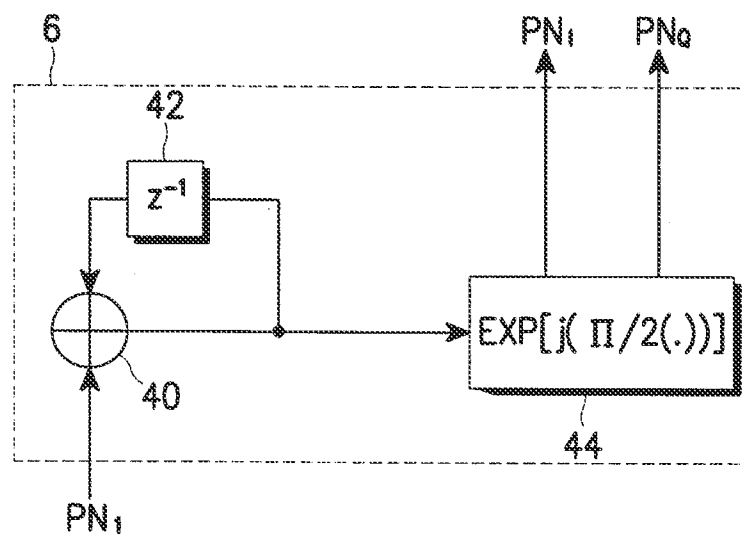


FIG. 4

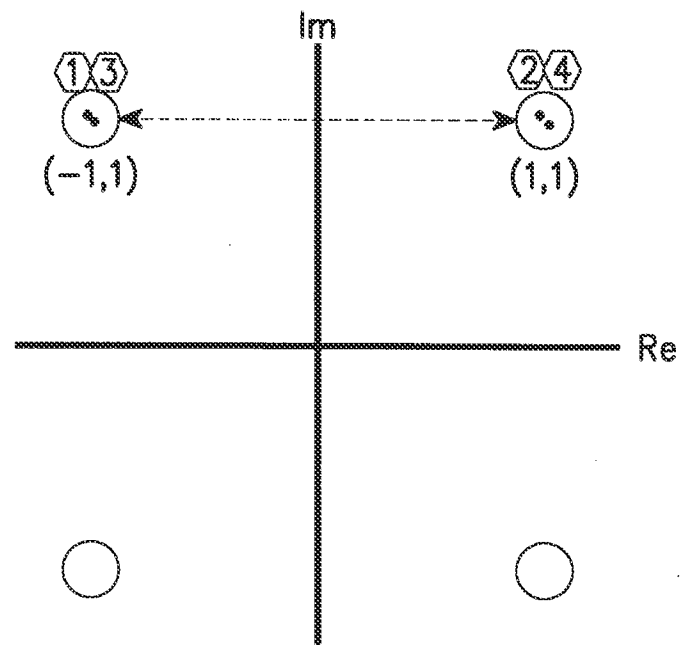


FIG. 5A

7/9

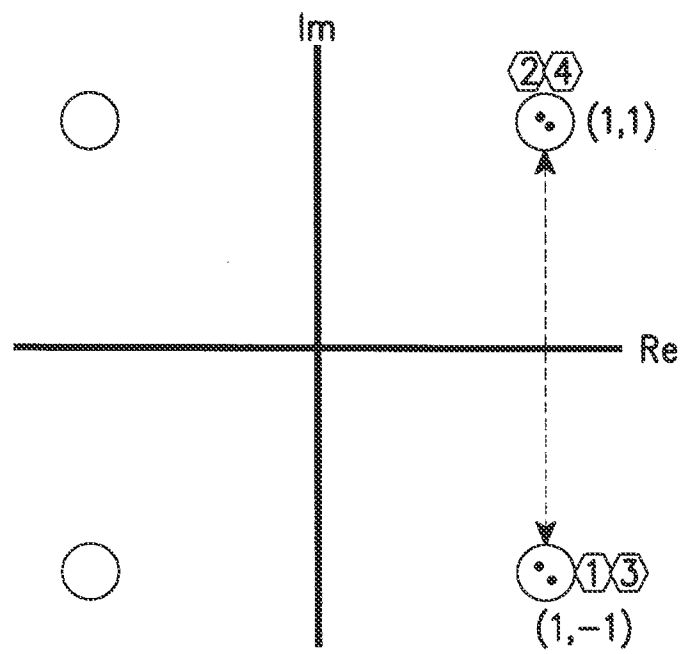


FIG. 5B

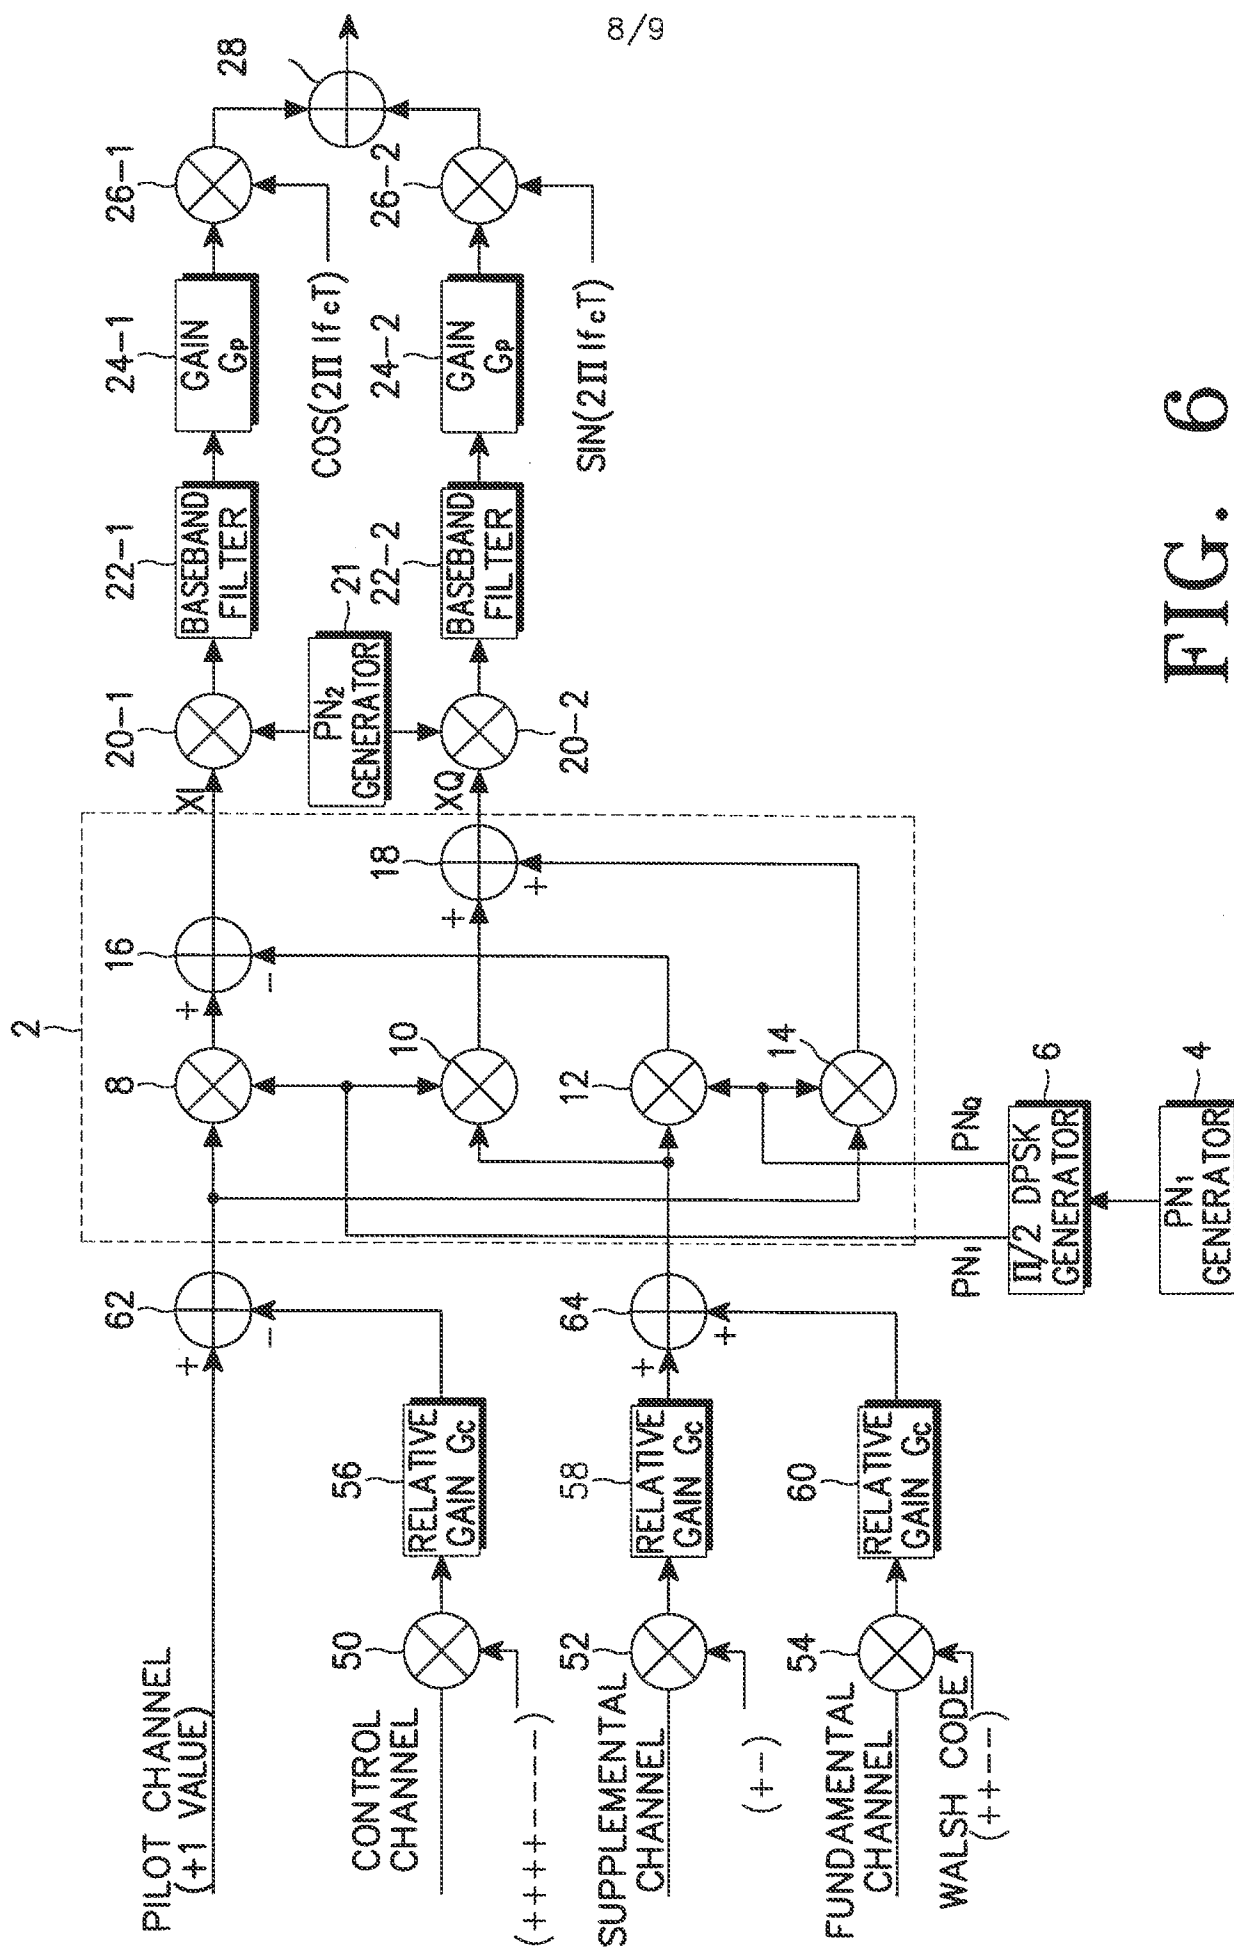


FIG. 6

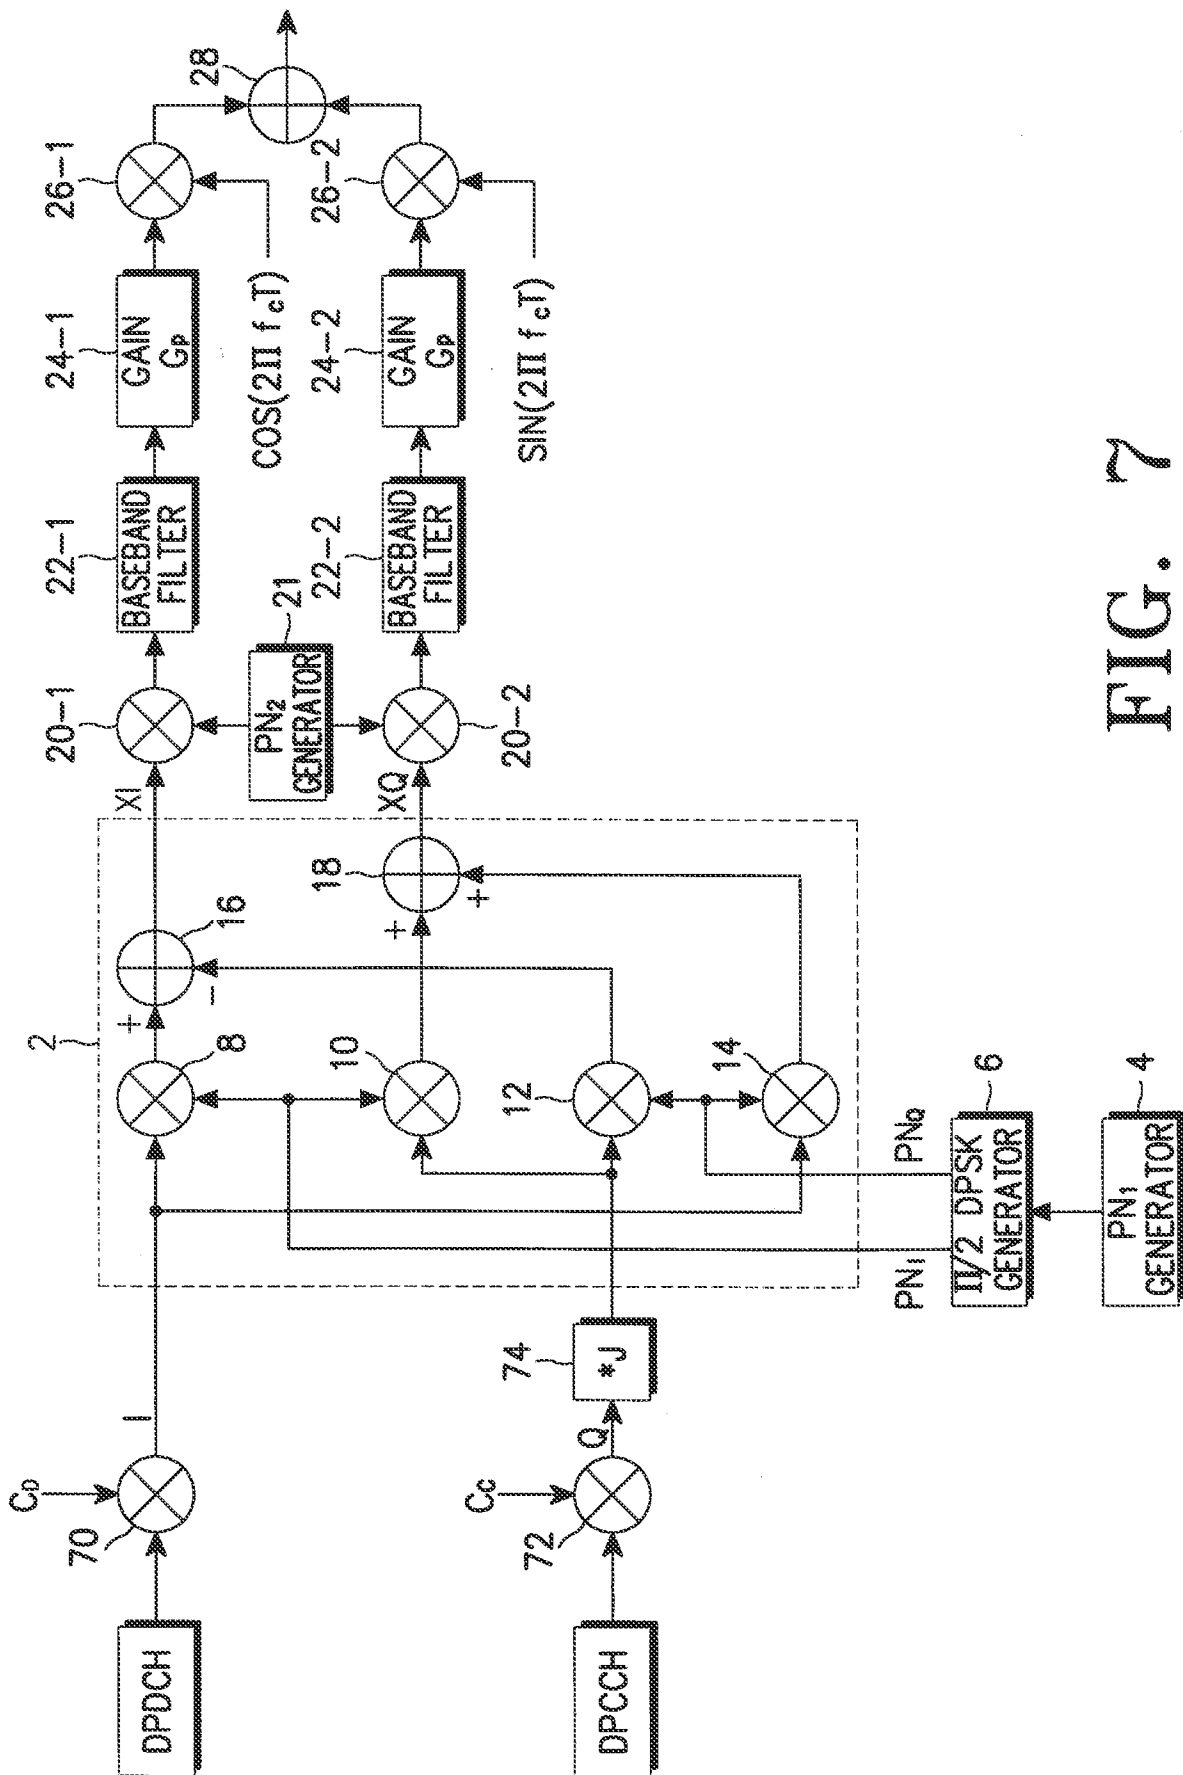


FIG. 7



# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 99/00234

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>6</sup>: H 04 B 7/216, 1/69

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>6</sup>: H 04 B 1/69, 1/707, 7/216; H 04 J 13/00, 13/02; H 04 K 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 170 410 (GRESSIONER), 08 December 1992 (08.12.92), fig.1-3; abstract; column 4, lines 18-51.	1,8,16
A	JP 5-235 894 (FUJITSU) Patent abstracts of Japan, Vol.17, No.691 (E-1479), 1993, abstract.	1-4,8-11, 16-18

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

26 July 1999 (26.07.99)

Date of mailing of the international search report

05 August 1999 (05.08.99)

Name and mailing address of the ISA/AT

Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna  
Facsimile No. 1/53424/200

Authorized officer

Dröscher

Telephone No. 1/53424/320

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR 99/00234

Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US A 5170410	08-12-1992	CA AA 2045881 CA C 2045881 DE C0 69114075 DE T2 69114075 EP A1 470352 EP B1 470352 ES T3 2080194 FR A1 2664113 FR B1 2664113	29-12-1991 27-12-1994 30-11-1995 04-04-1996 12-02-1992 25-10-1995 01-02-1996 03-01-1993 04-06-1993
JF 5235894		keine - none - rien	